

## TOOL BIT GREASING

### CAUTION

Insufficient greasing may cause abnormal wear of tool bush and tool, and tool breakage.

### IMPORTANT

Do not use lubricants other than those recommended, without prior written approval from Stelco Europa Limited.

Apply grease to bush and tool every two hours.


Adapt grease interval and amounts to tool wear rates and working conditions.

Tool shank must be well lubricated before installing tool.

### GREASING

While greasing, hammer must be upright against the tool, to ensure that grease will penetrate between tool and bush.

→ For Automatic Greasing System(optional), please refer to Chapter 13

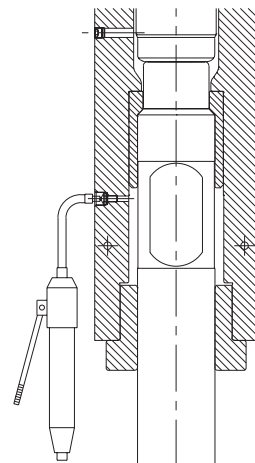

### Recommended Lubricant Greases

Manufacturer	Lubricant	Grease
	<b>Total</b>	Total EP#2
	<b>Shell</b>	Alvania EP#2
	<b>Mobil</b>	Mobil FAW#2 Or Cold Temp Mobil FAW#1
	<b>Yukong</b>	Crown EP2
	<b>Caltex</b>	Multipac EP2

